


# SUB 12i

## INSTALLATION SUBWOOFER

Subwoofer series takes advantage of tremendous experience in touring, installation and mobile markets. Cabinets are equipped with next-generation transducers with reinforced moving system capable of withstanding tremendous pressure and excursion while keeping distortion in check.

Sub 12i is a dedicated compact mounted subwoofer for high-quality low-frequency reinforcement in fixed installations. Equipped with 12" long excursion woofer, it is capable of impressive power output with small overall system size and visual footprint.

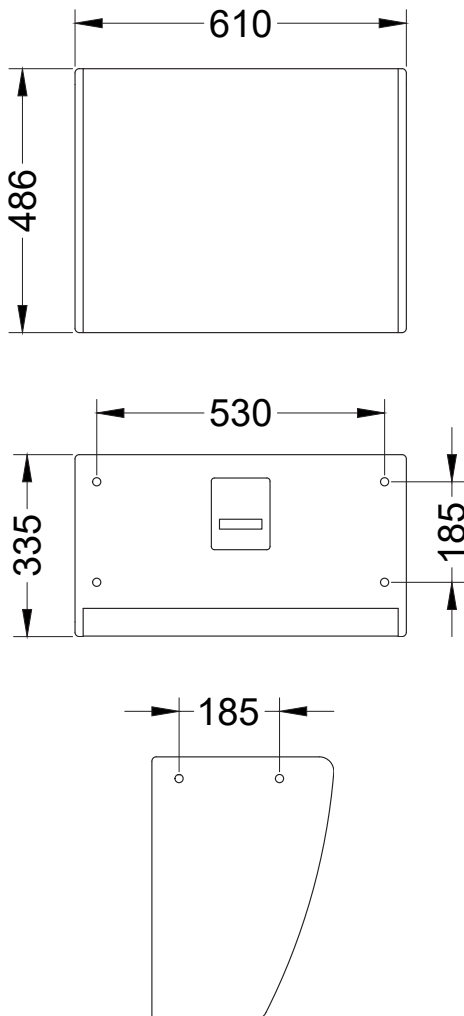

### Main features:

- 450W nominal power
- 12" woofer with 3" voice coil
- Efficient vented box design
- 130,5 dB Max SPL
- VESA 200x200, M10 mounting points

Frequency Response (-10dB)	45 - 300 Hz
Max SPL <sup>1</sup>	130,5 dB
Sensitivity (1W/1m)	95 dB
LF Driver	12", 3" VC
Impedance	4 / 8 Ohm
Nominal power <sup>2</sup>	450 W
Connectors	Barrier strip
Dimensions (W×H×D), mm	610x486x335 mm
Net weight, kg	29 kg
Shipping weight, kg	33 kg
Mounting	10x M10 mounting points VESA 200x200
Enclosure material	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent foam

<sup>1</sup> - peak value, calculated according to AES 2 - 2012

<sup>2</sup> - based on transducer power measured according to AES 2 - 2012