
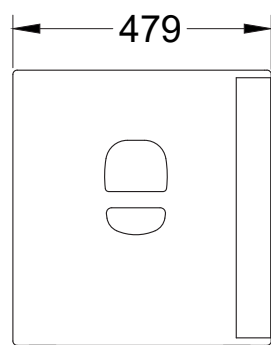
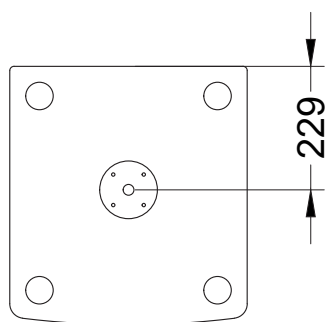


# SUB 15

## PASSIVE SUBWOOFER

Subwoofer series takes advantage of tremendous experience in touring, installation and mobile markets. Cabinets are equipped with next-generation transducers with reinforced moving system capable of withstanding tremendous pressure and excursion while keeping distortion in check.

Sub 15 is a compact passive subwoofer for mobile sound reinforcement and small installations. Equipped with 15" long excursion woofer, it is capable of impressive power output with small overall system size.

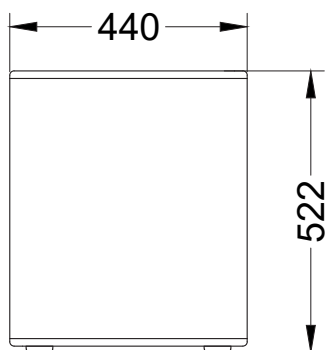

### Main features:

- 1000W nominal power
- 15" woofer with 4" voice coil
- Efficient vented box design
- 133 dB Max SPL
- M20 distance pole adapter

|                            |  |
|----------------------------|--|
| Frequency Response (-10dB) | 37 - 300 Hz                                |
| Max SPL <sup>1</sup>       | 133 dB                                     |
| Sensitivity (1W/1m)        | 94 dB                                      |
| LF Driver                  | 15", 4" VC                                 |
| Impedance                  | 4 / 8 Ohm                                  |
| Nominal power <sup>2</sup> | 1000 W                                     |
| Connectors                 | 2x Neutrik Speakon                         |
| Dimensions (W×H×D), mm     | 440x522x479 mm                             |
| Net weight, kg             | 37 kg                                      |
| Shipping weight, kg        | 40 kg                                      |
| Mounting                   | IM20 distance pole adapter                 |
| Enclosure material         | Plywood; wear-resistant paint              |
| Grill                      | Steel grill, acoustically transparent foam |

<sup>1</sup> - peak value, calculated according to AES 2 - 2012

<sup>2</sup> - based on transducer power measured according to AES 2 - 2012

With dedication to constant improvement of the products, manufacturer may change the listed specifications without prior notice