

CUE SUB

Passive
subwoofer



The CUE Series is a family of ultra-slim, high-performance installation loudspeakers designed for spaces where sound quality must coexist with architecture. Built for bars, restaurants, clubs, cultural venues, and public interiors, CUE delivers controlled, even coverage with exceptional speech intelligibility and musical clarity.


The slim-format enclosure minimizes visual impact while advanced transducer alignment ensures consistent sound across the listening area. Available in surface-mount and hidden in-wall versions, CUE adapts seamlessly to both expressive and invisible installations. Paired with the dedicated CUE SUB, the system scales from elegant background audio to confident, full-range performance.

CUE SUB is a ultra-slim, on-wall subwoofer designed to extend low-frequency performance in architectural installations without occupying floor space. Featuring dual 8" drivers firing directly into the wall, it delivers controlled, punchy bass while remaining physically safe and visually discreet. The wall-mount design eliminates exposed moving parts, making it ideal for public venues and family-accessible spaces. Supplied with an integrated mounting bracket for fast, secure installation. Once installed, it simply disappears into the system.

Available in black.




DIMENSIONS

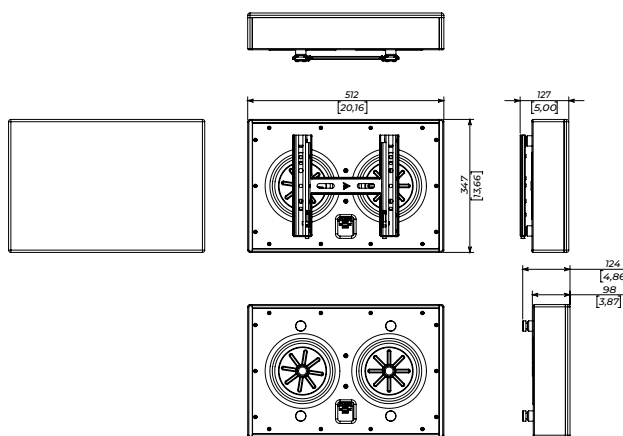

ACCESSORIES

CUE-SUB-Bracket
Wall bracket



SPECIFICATIONS

Frequency Response (-10dB)	45 - 200 Hz
Peak SPL ¹	122 dB
Sensitivity (1W / 1m)	84 dB
Drivers	2 x 8", 1,5" VC
Impedance	8 Ohm
Nominal power ²	400 W
Connectors	Phoenix
Dimensions (W x D x H)	512 x 98 x 347 mm / 20.16" x 3.87" x 13.66"
Dimensions (W x D x H) with bracket	512 x 127 x 347 mm / 20.16" x 5.00" x 13.66"
Weight / Shipping	11 kg; 24.25 lbs / 12 kg; 26.46 lbs
Mounting options	Mounting plate; Safety mounting point
Enclosure material	Plywood, wear-resistant paint
Speaker protection	Steel grill, acoustically transparent backing

¹ - pink noise, filtered according to AES 2 - 2012, crest factor 12 dB

² - based on transducer power measured according to AES 2 - 2012

CONNECTIONS

Signal +	+ terminal
Signal -	- terminal
High pass filter:	
Freq, no less than	45 Hz
Order, no less than	18 dB/oct
Recommended amplifier power	400 - 800 W on nominal impedance

SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).
4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.