






SUB 18i

INSTALLATION SUBWOOFER

Subwoofer series takes advantage of tremendous experience in touring, installation and mobile markets. Cabinets are equipped with next-generation transducers with reinforced moving system capable of withstanding tremendous pressure and excursion while keeping distortion in check.

Sub 18i is a dedicated mounted subwoofer for high-quality low-frequency reinforcement in fixed installations. Equipped with 18" long excursion woofer, it is capable of impressive power output with low frequency threshold and low visual footprint.

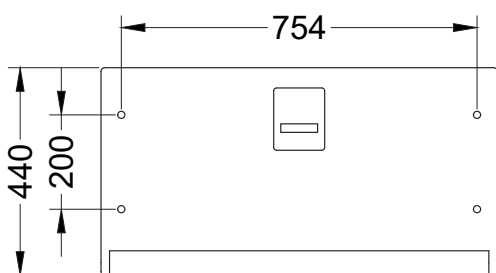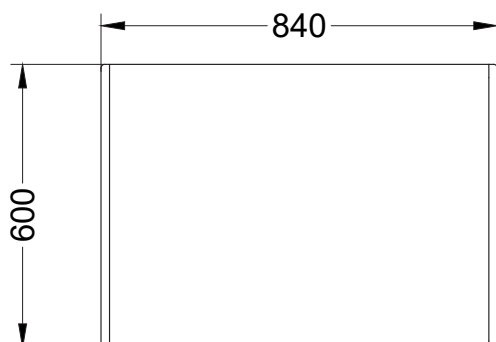

Main features:

- 1300 W nominal power
- 18" woofer with 4" voice coil
- Efficient vented box design
- 138 dB Max SPL
- VESA 200x200, M10 mounting points

Frequency Response (-10dB)	33 - 300 Hz
Max SPL ¹	138 dB
Sensitivity (1W/1m)	98 dB
LF Driver	18", 4" VC
Impedance	4 / 8 Ohm
Nominal power ²	1300 W
Connectors	Barrier strip
Dimensions (W×H×D), mm	840×600×440 mm
Net weight, kg	50 kg
Shipping weight, kg	55 kg
Mounting	10x M10 mounting points VESA 200x200
Enclosure material	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent foam

¹ - peak value, calculated according to AES 2 - 2012

² - based on transducer power measured according to AES 2 - 2012

With dedication to constant improvement of the products, manufacturer may change the listed specifications without prior notice