

## PAB-416/SW

Order No. 0131870



## PAB-416/WS

Order No. 0131880




### Pairs of high-quality PA speakers, 20 W, 16 Ω

- 2-way speaker systems in an ABS cabinet which is both functional and at the same time of an attractive appearance
- Polypropylene bass speaker and dome tweeter with horn front attachment (waveguide)
- High-quality crossover networks with a perfect long-term stability, e.g. due to consistently applying film capacitors
- Very well-balanced and clear sound which also convinces with the genuine reproduction of voices and demanding music and at the same time appears to be very unobtrusive at moderate levels
- Supplied with wall bracket



Due to the availability of the PAB-416/... speaker systems in 16 Ω, too, up to 8 speaker systems can be driven at one 2-channel standard amplifier with 4 Ω stability by means of basic parallel connection.

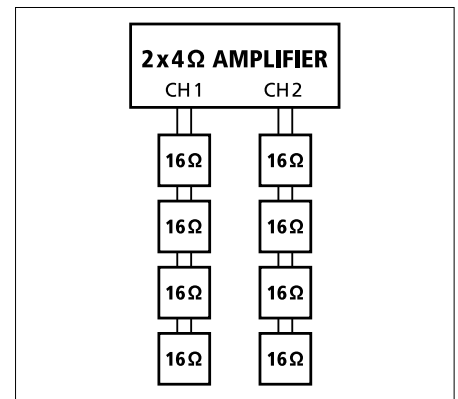

Model	PAB-416/SW	PAB-416/WS
Total power rating	30 W	30 W
Power rating (RMS)	20 W	20 W
Frequency range	80-22,000 Hz	80-22,000 Hz
Sensitivity	87 dB/W/m	87 dB/W/m
Dimensions	150 x 240 x 140 mm	150 x 240 x 140 mm
Weight	1.8 kg	1.8 kg
Inputs	speaker screw terminal	speaker screw terminal


## MKS-8PRO

Order No. 0131770



### Pair of high-performance PA speakers, 100 W each speaker system

- 2-way speaker systems with ABS cabinet (bass-reflex) of modern design
- 20 cm bass speaker and dome tweeter
- Very extended frequency response and high volume capability
- Supplied with mounting brackets for wall mounting

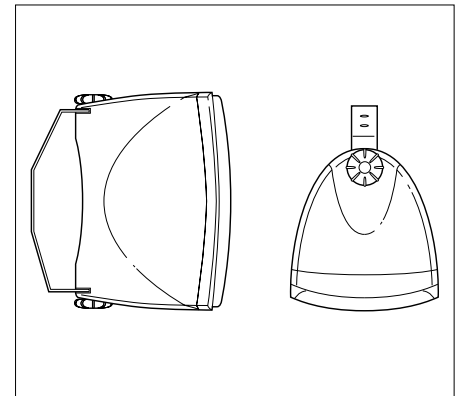

Model	MKS-8PRO
Total power rating	180 W
Power rating (RMS)	100 W
Frequency range	40-21,000 Hz
Sensitivity	91 dB/W/m
Dimensions	265 x 374 x 285 mm
Weight	5.7 kg
Inputs	speaker screw terminal

## MKS-88/SW

Order No. 0131150




## MKS-88/WS

Order No. 0131160



## MKS-64/SW

Order No. 0131130



## MKS-64/WS

Order No. 0131140



## MKS-34/SW

Order No. 0131110



## MKS-34/WS

Order No. 0131120



### Pairs of 2-way speaker systems

- MKS-88... in 8 Ω, MKS-64... and MKS-34... in 4 Ω
- Dome tweeter
- Excellent sound quality
- Black (SW) or white (WS) plastic cabinet
- Pivoting mounting bracket
- Bevelled shape of cabinets also allows mounting in corners



Model	MKS-88/SW	MKS-88/WS	MKS-64/SW	MKS-64/WS	MKS-34/SW	MKS-34/WS
Total power rating	125 W	125 W	90 W	90 W	45 W	45 W
Power rating (RMS)	85 W	85 W	60 W	60 W	30 W	30 W
Frequency range	40-20,000 Hz	40-20,000 Hz	60-20,000 Hz	60-20,000 Hz	80-20,000 Hz	80-20,000 Hz
Sensitivity	89 dB/W/m	89 dB/W/m	89 dB/W/m	89 dB/W/m	87 dB/W/m	87 dB/W/m
Dimensions	270 x 370 x 220 mm	270 x 370 x 220 mm	215 x 290 x 172 mm	215 x 290 x 172 mm	130 x 192 x 115 mm	130 x 192 x 115 mm
Weight	5.4 kg	5.4 kg	3.4 kg	3.4 kg	1.3 kg	1.3 kg
Inputs	spring-load. speaker term.	spring-load. speaker term.	spring-load. speaker term.	spring-load. speaker term.	spring-load. speaker term.	spring-load. speaker term.