

BASIC LINE

PA-324

Order No. 0174420




Mono PA mixing amplifier

- 1 x 240 W
- 3 microphone inputs, one of which is a balanced input
- Mic 1/line 1 with adjustable input sensitivity, priority circuit and adjustable automatic talkover
- 2 stereo line inputs
- 1 telephone input for telephone systems with audio output
- Speaker outputs via screw terminals
- 1 line output
- Input and output level controls
- 2-way tone control for the output
- 48 V phantom power for channel 1, can be activated as required
- 482 mm (19") rack installation with supplied mounting brackets



Model	PA-324
Peak output power	340 W
Power rating	240 W
Inputs	5 mV/600 Ω (mic), 350 mV/10 kΩ (aux), 1 V/10 kΩ (telephone)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	66 dB (mic) 80 dB (aux)
THD	< 0.5%
Power supply	~ 230 V/50 Hz/740 VA
Dimensions	430 x 88 x 380 mm, 2 RS
Weight	11.6 kg

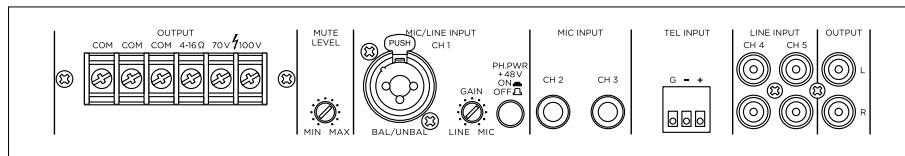

PA-312

Order No. 0173640




Mono PA mixing amplifier

- 1 x 120 W
- Silent operation due to fanless cooling concept
- 3 microphone inputs, one of which is a balanced input
- Mic 1/line 1 with input sensitivity, priority circuit and adjustable automatic talkover
- 2 stereo line inputs
- 1 telephone input for telephone systems with audio output
- Speaker outputs via screw terminals
- 1 line output
- Input and output level controls
- 2-way tone control for the output
- 48 V phantom power for channel 1, can be activated as required
- 482 mm (19") rack installation with supplied mounting brackets



Model	PA-312
Peak output power	160 W
Power rating	120 W
Inputs	5 mV/600 Ω (mic), 350 mV/10 kΩ (aux), 1 V/10 kΩ (telephone)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	66 dB (mic) 80 dB (aux)
THD	< 0.5%
Power supply	~ 230 V/50 Hz/450 VA
Dimensions	430 x 88 x 335 mm, 2 RS
Weight	7.8 kg

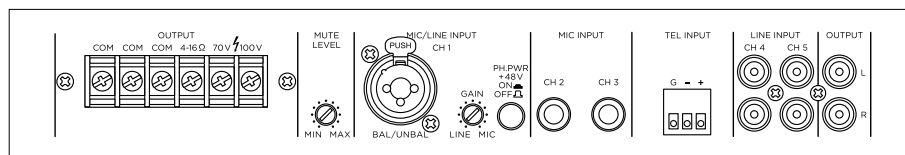

PA-306

Order No. 0176800



Mono PA mixing amplifier

- 1 x 60 W
- Silent operation due to fanless cooling concept
- 3 microphone inputs, one of which is a balanced input
- Mic 1/line 1 with adjustable input sensitivity, priority circuit and adjustable automatic talkover
- 2 aux inputs
- 1 telephone input for telephone systems with audio output
- Speaker outputs via screw terminals
- 1 line output
- Input and output level controls
- 2-way tone control for the output
- 48 V phantom power for channel 1, can be activated as required
- 482 mm (19") rack installation with supplied mounting brackets



Model	PA-306
Peak output power	80 W
Power rating	60 W
Inputs	6 mV/600 Ω (mic), 310 mV/10 kΩ (aux), 1 V/10 kΩ (telephone)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	66 dB (mic) 80 dB (aux)
THD	< 0.5%
Power supply	~ 230 V/50 Hz/250 VA
Dimensions	430 x 88 x 335 mm, 2 RS
Weight	6.7 kg

