

BASIC LINE

PA-948S

Order No. 0177020




Mono PA power amplifier

- 1 x 480 W
- Temperature-controlled fan, continuously adjustable
- Protected against overheating, overload and short circuit
- LED indication for clip, protect, overtemperature, output level and 100 V/70 V



- Feed-through output (link)
- Speaker outputs via screw terminals

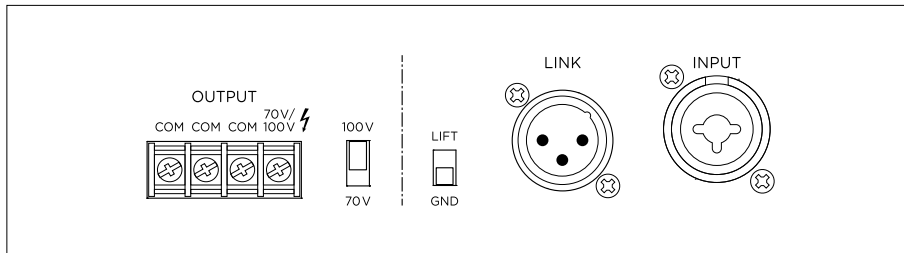

| Model | PA-948S |
|-----------------------|-------------------------|
| Power rating | 480 W |
| Power rating at 100 V | 1 x 480 W |
| Output impedance | 70 V/10 Ω, 100 V/20 Ω |
| Inputs | 710 mV/10 kΩ, balanced |
| Frequency range | 80-16,000 Hz |
| S/N ratio | > 98 dBA |
| THD | < 1% |
| Power supply | ~ 230 V/50 Hz/1100 VA |
| Dimensions | 483 x 44 x 255 mm, 1 RS |
| Weight | 4 kg |

PA-924S

Order No. 0177010




Mono PA power amplifier

- 1 x 240 W
- Temperature-controlled fan, continuously adjustable
- Protected against overheating, overload and short circuit
- LED indication for clip, protect, overtemperature, output level and 100 V/70 V



- Feed-through output (link)
- Speaker outputs via screw terminals

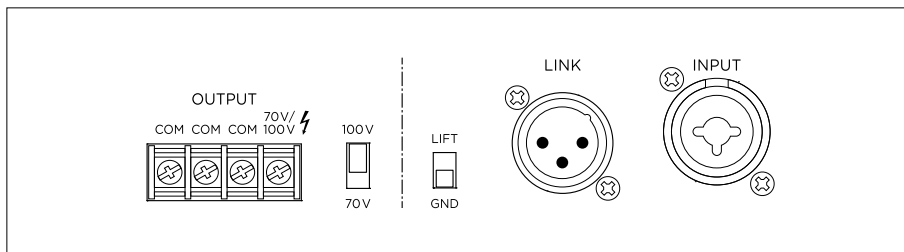

| Model | PA-924S |
|-----------------------|-------------------------|
| Power rating | 240 W |
| Power rating at 100 V | 1 x 240 W |
| Output impedance | 70 V/20 Ω, 100 V/40 Ω |
| Inputs | 650 mV/10 kΩ, balanced |
| Frequency range | 80-16,000 Hz |
| S/N ratio | > 98 dBA |
| THD | < 1% |
| Power supply | ~ 230 V/50 Hz/495 VA |
| Dimensions | 483 x 44 x 255 mm, 1 RS |
| Weight | 3.8 kg |


PA-912S

Order No. 0177000



Mono PA power amplifier

- 1 x 120 W
- Temperature-controlled fan, continuously adjustable
- Protected against overheating, overload and short circuit
- LED indication for clip, protect, overtemperature, output level and 100 V/70 V
- Feed-through output (link)
- Speaker outputs via screw terminals

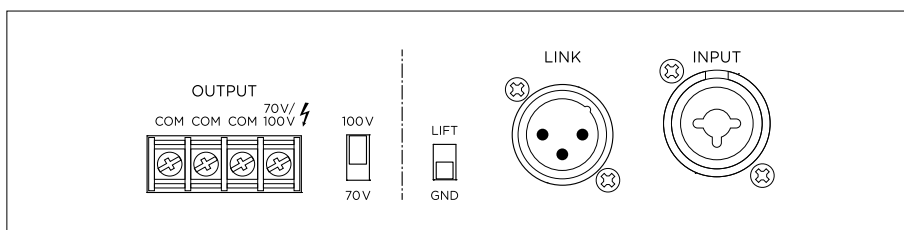

| Model | PA-912S |
|-----------------------|-------------------------|
| Power rating | 120 W |
| Power rating at 100 V | 1 x 120 W |
| Output impedance | 70 V/40 Ω, 100 V/80 Ω |
| Inputs | 670 mV/10 kΩ, balanced |
| S/N ratio | > 98 dBA |
| THD | < 1% |
| Power supply | ~ 230 V/50 Hz/225 VA |
| Dimensions | 483 x 44 x 255 mm, 1 RS |
| Weight | 3.5 kg |