

SPECIALS

**SA-100**


Order No. 0254120



**Compact universal stereo amplifier, 50 W**

- Silent operation due to fanless cooling concept
- Additional 3.5 mm connection with switchable sensitivity on the front panel
- USB port on the front panel for power supply and for charging external devices
- Audio source selector switch
- Controls for volume, bass and treble
- 6.3 mm headphone output
- Robust metal housing

Model	SA-100
Peak output power	2 x 50 W
Power rating	50 W
Power rating at 4 Ω	2 x 25 W
Power rating at 8 Ω	2 x 20 W
Inputs	140 mV/46 kΩ (PC, CD, aux) 140 mV/12 kΩ, 25 mV/32 kΩ (player)
Frequency range	20-20,000 Hz
Equalizer bass	± 12 dB
Equalizer treble	± 12 dB
S/N ratio	> 70 dB
Power supply	~ 230 V/50 Hz/150 VA
Dimensions	212 x 56 x 250 mm
Weight	2.6 kg

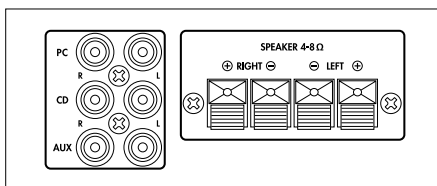

**SA-50**


Order No. 0254620



**Compact universal stereo amplifier, 25 W**

- Silent operation due to fanless cooling concept
- Additional 3.5 mm connection with switchable sensitivity on the front panel
- Audio source selector switch
- Controls for volume, bass and treble
- 6.3 mm headphone output
- Robust metal housing

Model	SA-50
Peak output power	2 x 25 W
Power rating	25 W
Power rating at 4 Ω	2 x 12.5 W
Power rating at 8 Ω	2 x 10 W
Inputs	115 mV/12 kΩ (PC), 115 mV/12 kΩ (CD), 115 mV/12 kΩ (aux), 20 mV/32 kΩ (player, high), 20 mV/32 kΩ (player, low)
Frequency range	20-20,000 Hz
Equalizer bass	± 12 dB
Equalizer treble	± 12 dB
S/N ratio	> 65 dB
Power supply	~ 230 V/50 Hz/50 VA
Dimensions	212 x 56 x 200 mm
Weight	1.8 kg

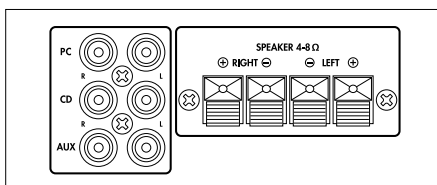

**SA-160BT**

Order No. 0256010



**Mini stereo amplifier, 2 x 30 W, with Bluetooth interface, NFC and remote control.**

- Integrated hi-fi audio amplifier
- For speakers with an impedance of 8 Ω
- Volume control with integrated source selector function, LED indicator
- Near Field Communication (NFC)
- Gold-plated speaker terminals
- 1 stereo input via RCA jacks L/R
- 1 line output via 3.5 mm stereo jack
- Fixed antenna
- Metal housing
- Power is provided via enclosed power supply

Model	SA-160BT
Peak output power	2 x 60 W
Power rating	60 W
Power rating at 8 Ω	2 x 30 W
Inputs	660 mV/10 kΩ
Frequency range	20-20,000 Hz
S/N ratio	> 99 dBA
Power supply	via encl. power supply
Standby current	100 mA
Dimensions	150 x 49 x 122 mm
Weight	610 g
Connections	1 x RCA L/R (line), 4 x spring-load. speaker term. (speakers)

