


### Speaker Cables

OFC 50m

"TOP QUALITY, HIGHLY FLEXIBLE"

- 50 m reel
- Suitable for stage applications as well as for 100 V line technique
- Metre marking

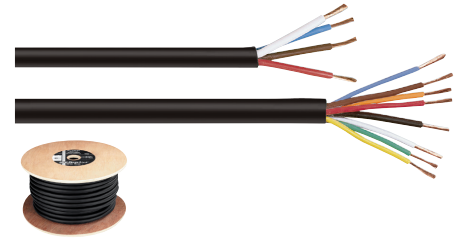


Model	Order No.	Cable diameter	Internal conductor	No. of cores
SPC-540/SW	12.9720	Ø 11 mm	4 x 2.5 mm <sup>2</sup>	4
SPC-580/SW	12.9730	Ø 13 mm	8 x 2 mm <sup>2</sup>	8

### Speaker Cables

OFC 100m HALOGEN FREE

"TOP QUALITY, HIGHLY FLEXIBLE"

- 100 m reel
- Halogen-free
- Suitable for stage applications as well as for 100 V line technique
- Metre marking

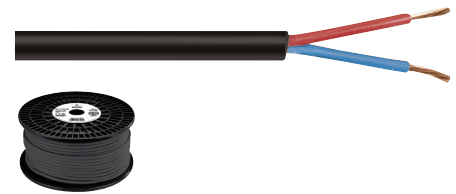


Model	Order No.	Cable diameter	Internal conductor
SPC-515H/SW	11.2610	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-525H/SW	11.2620	Ø 8.2 mm	2 x 2.5 mm <sup>2</sup>

### Speaker Cables

OFC 100m

"TOP QUALITY, HIGHLY FLEXIBLE"

- 100 m reel
- Suitable for stage applications as well as for 100 V line technique
- Metre marking

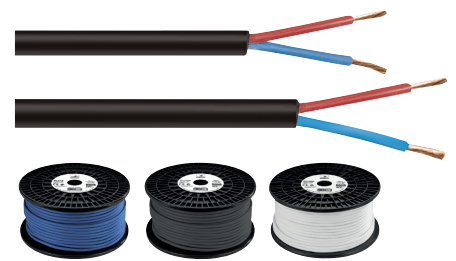

Model	Order No.	Colour	Cable diameter	Internal conductor
SPC-515/BL	12.9680	blue	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-515/SW	12.9690	black	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-515/WS	12.9700	white	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-525/SW	12.9710	black	Ø 8.2 mm	2 x 2.5 mm <sup>2</sup>

### Speaker Cable "Economy"

100m

"ECONOMY QUALITY"

- 100 m reel
- Copper-clad aluminium litz wire (CCA)
- Conductor protected by fabric inlay and fleece sleeve



Model	Order No.	Cable diameter	Internal conductor
SPC-515CA	11.2020	Ø 7 mm	2 x 1.5 mm <sup>2</sup>
SPC-525CA	11.2160	Ø 8.5 mm	2 x 2.5 mm <sup>2</sup>