

Components

Lighting Technology

LEDP-1260RGB


Order No. 05.0219



LED panel

- = 24 V/48 W
- 1,195 x 10 x 295 mm
- Surface-mounted frame, flush-mounted frame, mounting set, power supply and controller available at option
- Aluminium frame
- 3 m connection cable

Model	LEDP-1260RGB
Power rating	48 W
Luminous colour	red/green/blue
Luminous flux	950-1,050 lm
Energy efficiency class	A+
Fitted with	216 x SMD 5050 RGB
Dimmable	yes
Beam angle	120°
Power supply	via optional power supply
Power consumption, operation	48 W
Current consumption	2 A
Dimensions	1,195 x 10 x 595 mm

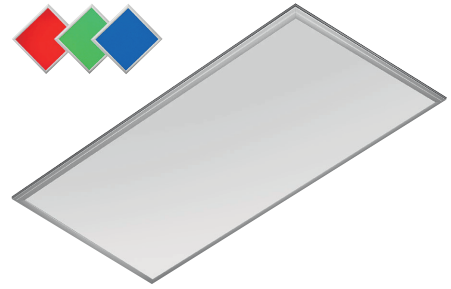

LEDP-1230RGB


Order No. 05.0218



LED panel

- = 24 V/48 W
- 1,195 x 10 x 295 mm
- Surface-mounted frame, flush-mounted frame, mounting set, power supply and controller available at option
- Aluminium frame
- 3 m connection cable

Model	LEDP-1230RGB
Power rating	48 W
Luminous colour	red/green/blue
Luminous flux	950-1,050 lm
Energy efficiency class	A+
Fitted with	216 x SMD 5050 RGB
Dimmable	yes
Beam angle	120°
Power supply	via optional power supply
Power consumption, operation	48 W
Current consumption	2 A
Dimensions	1,195 x 10 x 295 mm

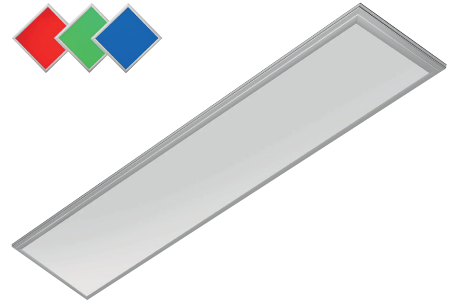

LEDP-620RGB


Order No. 05.0217



LED panel

- = 24 V/48 W
- 615 x 10 x 615 mm
- Surface-mounted frame, flush-mounted frame, mounting set, power supply and controller available at option
- Aluminium frame
- 3 m connection cable

Model	LEDP-620RGB
Power rating	48 W
Luminous colour	red/green/blue
Luminous flux	950-1,050 lm
Energy efficiency class	A+
Fitted with	216 x SMD 5050 RGB
Dimmable	yes
Beam angle	120°
Power supply	via optional power supply
Power consumption, operation	48 W
Current consumption	2 A
Dimensions	615 x 10 x 615 mm

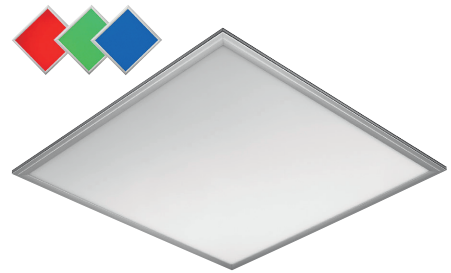

LEDP-600RGB


Order No. 05.0216



LED panel

- = 24 V/48 W
- 595 x 10 x 595 mm
- Surface-mounted frame, flush-mounted frame, mounting set, power supply and controller available at option
- Aluminium frame
- 0.5 m connection cable

Model	LEDP-600RGB
Power rating	48 W
Luminous colour	red/green/blue
Luminous flux	950-1,050 lm
Energy efficiency class	A+
Fitted with	216 x SMD 5050 RGB
Dimmable	yes
Beam angle	120°
Power supply	via optional power supply
Power consumption, operation	48 W
Current consumption	2 A
Dimensions	595 x 10 x 595 mm

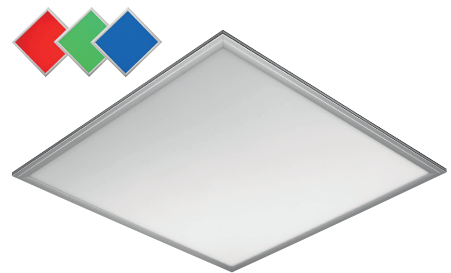

LEDP-300RGB

Order No. 05.0215



LED panel

- = 24 V/12 W
- 295 x 10 x 295 mm
- Surface-mounted frame, flush-mounted frame, mounting set, power supply and controller available at option
- Aluminium frame
- 3 m connection cable

Model	LEDP-300RGB
Power rating	12 W
Luminous colour	red/green/blue
Luminous flux	230-240 lm
Energy efficiency class	A+
Fitted with	48 x SMD 5050 RGB
Dimmable	yes
Beam angle	120°
Power supply	via optional power supply
Power consumption, operation	12 W
Current consumption	0.5 A
Dimensions	295 x 10 x 295 mm

