


### Microphone Cables

#### "TOP QUALITY"

- 50 m coil or 100 m reel
- 1 x 0.7 mm<sup>2</sup>
- Metre marking
- Shielded
- Outside diameter: Ø 6.8 mm
- Capacitance: 140 pF/m
- Low-noise

OFC 50m

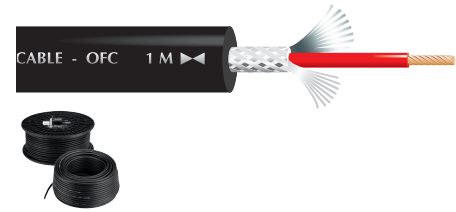

Model	Order No.	Length	Shielding	Packaging
MLC-50/SW	06.0820	50 m	single	coil
MLC-150/SW	06.5740	100 m	single	reel


### AC-102/SW

Order No. 06.4300

100m

**Audio cable**, with highly flexible litz wire.

- 100 m reel
- 2 x 0.12 mm<sup>2</sup>
- Individual shielding
- Outside diameter: 2 x Ø 2.6 mm
- Capacitance: 250 pF/m

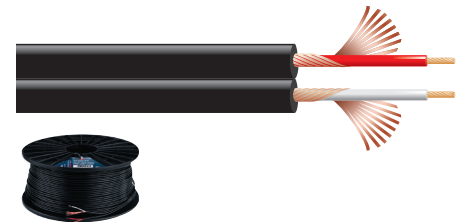

### AC-53/SW


Order No. 06.4840

OFC 50m

**Audio cable**

#### "HIGHLY FLEXIBLE"

- 50 m coil
- 2 x 0.29 mm<sup>2</sup> + 1 x 0.2 mm<sup>2</sup>
- Double shielding
- Outside diameter: 2 x Ø 5.5 mm + 1 x Ø 1.5 mm
- Cable capacitance: 165 pF/m
- Extra moulded wire, e.g. as control wire for car amplifiers or as ground wire for record players

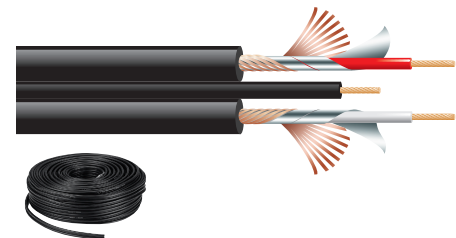

### CDMX-3

Order No. 11.1330

100m

**Control lead**, for transmitting digital DMX512 signals or AES/EBU signals.

- 100 m reel
- 2 x 0.22 mm<sup>2</sup>
- Metre marking
- Double shielding
- Outside diameter: Ø 4.5 mm
- High tensile strength
- Impedance level: 110 Ω
- Very low capacitance: 57 pF/m

