


# NX 12A

## FULL-RANGE POWERED SPEAKER

NX series represents solid and powerful solutions for fixed installations as well as demanding mobile sound applications. NX full-range cabinets are based on top-line neodymium magnet transducers and high frequency drivers fitted with demodulation rings and copper caps for less distortions and improved voice coil cooling, allowing for prolonged high-SPL operation while preserving clarity and intelligibility.

NX 12A is a powered speaker based on 12" cone transducer and 1,5" HF driver. Speaker is equipped with pole mount adapter and M10 mounting points for various installation purposes and complete with amplifier module with built-in presets for ease of setup and use.

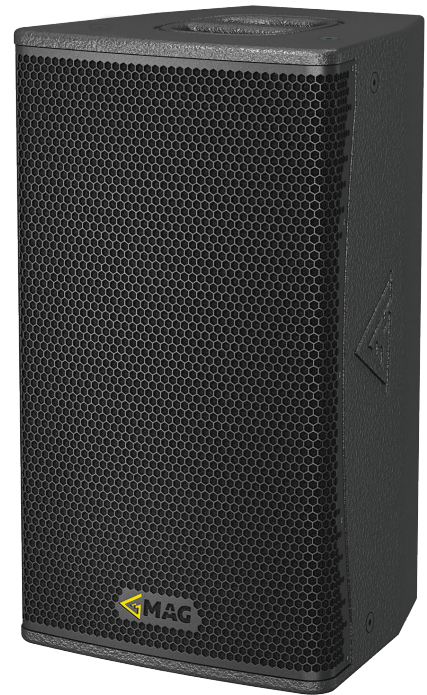

### Main features:

- 900 + 500 W nominal power
- 12" woofer with 3" voice coil
- 1,5" HF driver with 2,8" voice coil
- 134 dB Max SPL
- Pole mount adapter, M10 mounting points

Frequency Response (-10dB)	50 - 20000 Hz
Max SPL (calculated)	135 dB
LF Driver	12", 3" VC
HF Driver	1,5", 2,8" VC
Nominal Coverage Angle (Horizontal x Vertical)	80 x 70 deg
Amplifier power	900 + 500 W
Amplifier	Class D, fan cooling, DSP with phase-linear FIR
Input sensitivity	0 dBV (1 V RMS)
Connector	XLR input, XLR output, Powercon mains
Dimensions (W×H×D)	379x660x367
Net weight	25 kg
Shipping weight	28 kg
Mounting	10x M10 mounting points, 35mm pole socket
Enclosure material	Plywood; wear-resistant paint
Grill	Steel grill, polymer protective net

With dedication to constant improvement of the products, manufacturer may change the listed specifications without prior notice